

ES-80 Exit Button




- Obvious indicators around the edges of the unit.
- Activate without pressing to prevent any disease contagion. It is suitable for access control system that widely used in public. Areas such as hospitals or restaurants.
- Built-in buzzer .
- Input power range from DC12-24V.
- Easy to assemble, 2 set of output points to connect other equipment.

Specification

- Power supply : DC 12V~DC 24V ($\pm 5\%$)
- Operation current :
DC 12V/38mA(Standby)/62mA(Operation) ($\pm 15\%$)
DC 24V/24mA(Standby)/42mA(Operation) ($\pm 15\%$)
- Buzzer : Enable/Disable
- Indicator : Dual-color (Blue and green)
- Output : COM. / N.O. / N.C.
(Maximum load of 1A@30VDC / 0.3A@125VAC)
- Material : PC& Aluminum
- Dimensions : 260mm(L)x80mm(W)x28mm(H)
- Weight : 600g

Dimensions

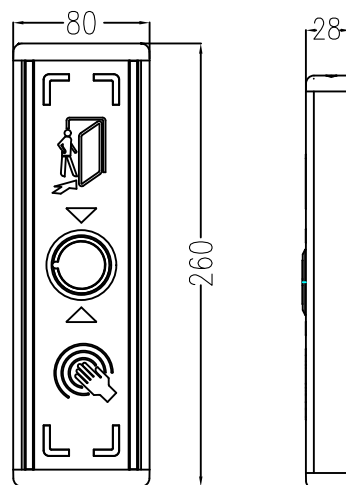

Unit:mm

Connections

